


# Technical Information

- Snap-in mounting from front
- Solder terminal or quick connect from single terminal
- Protection Class 1
- Integral plug retention feature

## Dimensional Data & Panel Preparation

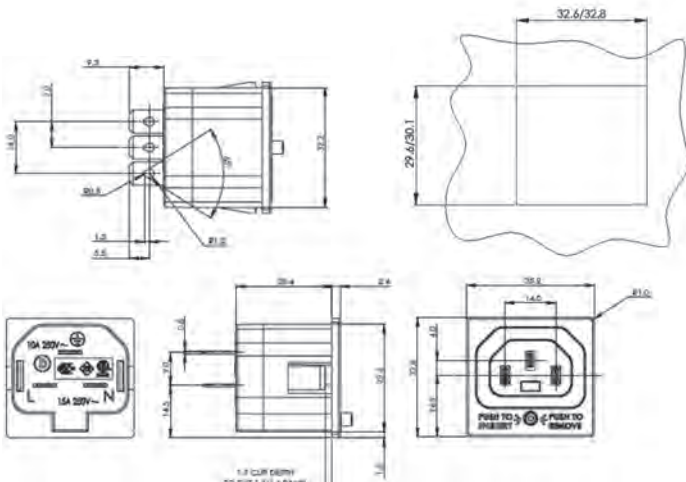

### Technical Data

Rated current/voltage 10A /250 VAC

Insulation resistance  
10M $\Omega$ (500 VDC, 1 Min.)

Dielectric Strength: 2KV (50 Hz,  
1 Min.) to accessible surfaces

Material: Socket – Thermoplastic,  
black, UL94V-0

### Standards

IEC/EN 60320-2-2/F

### Approvals

ENEC (10 A/250VAC)

ETLus (15 A/250VAC)