LBC 3470/00 Horn Loudspeaker

www.boschsecurity.com





The LBC 3470/00 is a 15 W high-efficiency circular horn loudspeaker, provide excellent speech reproduction and sound distribution for a wide scope of indoor and outdoor applications. It is ideal for sports grounds, parks, exhibition areas, factories and swimming pools.

The horn is made from ABS and finished in light gray (RAL 7035).

Features

- ► High-efficiency driver
- ► Excellent speech reproduction
- ▶ Versatile mounting bracket
- ▶ Water-and dust protected to IP 65
- Complies with international installation and safety regulations

Technical Specifications

Electrical*	
Maximum power	22.5 W
Rated power (PHC)	15 W
Power tapping	15/7.5/3.75 W
Sound pressure level at 15 W / 1 W (1 kHz, 1 m)	115 / 103 dB (SPL)
Effective frequency range (- 10 dB)	500 Hz to 5 kHz
Opening angle at 1 kHz / 4 kHz (-6 dB)	
Horizontal	130°
Vertical	50°
Rated input voltage	100 V
Rated impedance	667 Ohm
Connection *Technical performance da	4-wire cable. Lenght: 500 mm (19.68 in) ta acc. to IEC 60268-5
Mechanical	

Mechanical	
Dimensions (W x D)	(213 x 186) x 310 mm (8.39 x 7.32) x 12.2 in)
Weight	1.5 kg (3.30 lb)
Color	Light gray (RAL 7035)
Material (horn / rear	ABS

cover)	
Environmental	
Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%


Certifications and Approvals		
Acc. to EN 60065		
Acc. to UL94V0		
Acc. to IEC 60529, IP 65		

Mounting

The horn loudspeaker is standard supplied with a sturdy adjustable mounting bracket, allowing the sound beam to be accurately directed.

Simple power setting

The horn loudspeaker includes a 100 V transformer with taps on the primary winding to allow different power settings. Nominal full-power, half-power or quarter-power radiation (i.e. in 3 dB steps) can easily be selected by connection the amplifier output to the appropriate tap. A 500 mm (19.68 in) long four-core cable is fitted to the horn. Each core has a different color, which is connected to the one of the primary taps on the transformer.

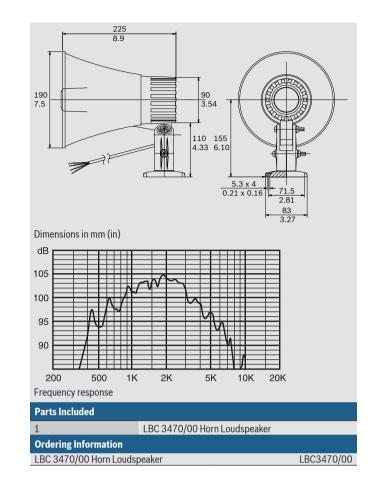

Represented by:

Bosch Security Systems, Inc.

12000 Portland Avenue South Burnsville MN 55337, USA Phone: +1-800-392-3497 Fax: +1-800-955-6831 audiosupport@us.bosch.com www.boschsecurity.com

Europe, Middle East, Africa:

Bosch Security Systems B.V. P.O. Box 80002 5617 BA Eindhoven, The Netherlands Phone: + 31 40 2577 284 Fax: +31 40 2577 330 emea.securitysystems@bosch.com www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SFA) Pte Ltd. Security Systems 11 Bishan Street 21 Singapore 573943 Phone: +65 6571 2808 Fax: +65 6571 2699 apr.securitysystems@bosch.com www.boschsecurity.asia

China:

201 Building, No. 333 Fuquan Road North IBP Changning District, Shanghai 200335 China Phone +86 21 22181111 Fax: +86 21 22182398 www.boschsecurity.com.cn

Bosch (Shanghai) Security Systems Ltd. Robert Bosch Ltda Security Systems Division Via Anhanguera, Km 98 CEP 13065-900 Campinas, Sao Paulo, Brazil Phone: +55 19 2103 2860 Fax: +55 19 2103 2862 al.securitysystems@bosch.com www.boschsecurity.com