



CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

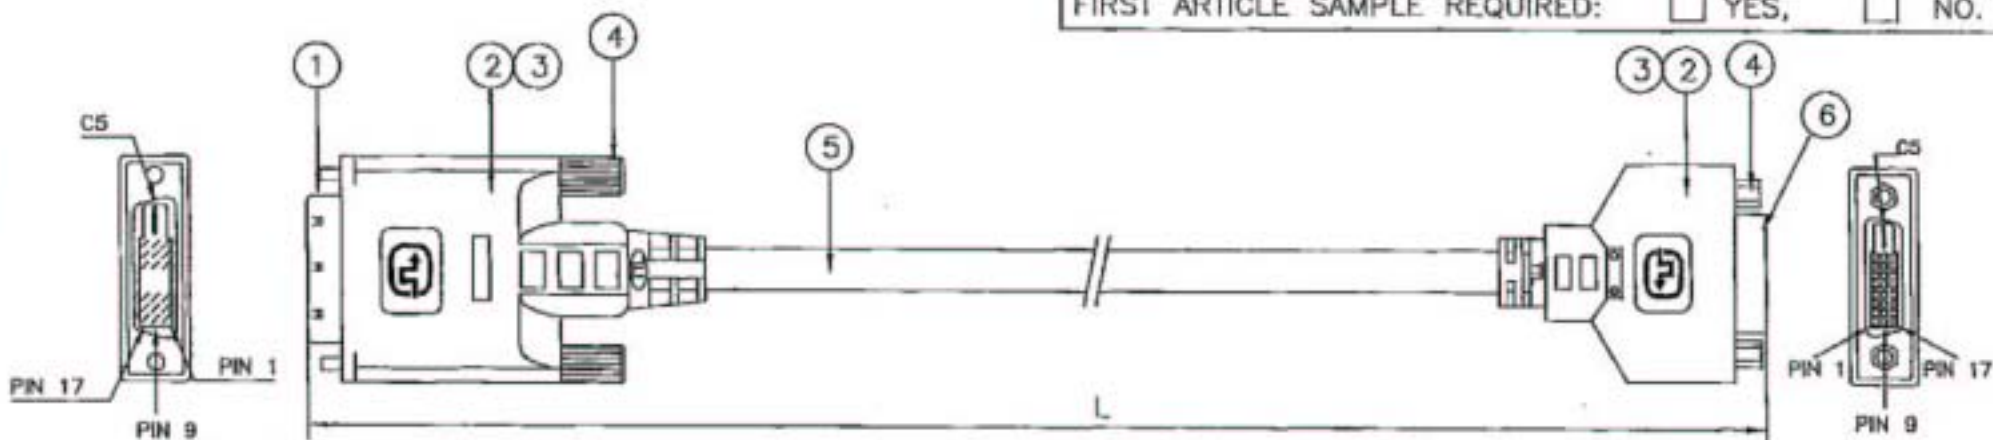

PINOUT CONFIGURATION

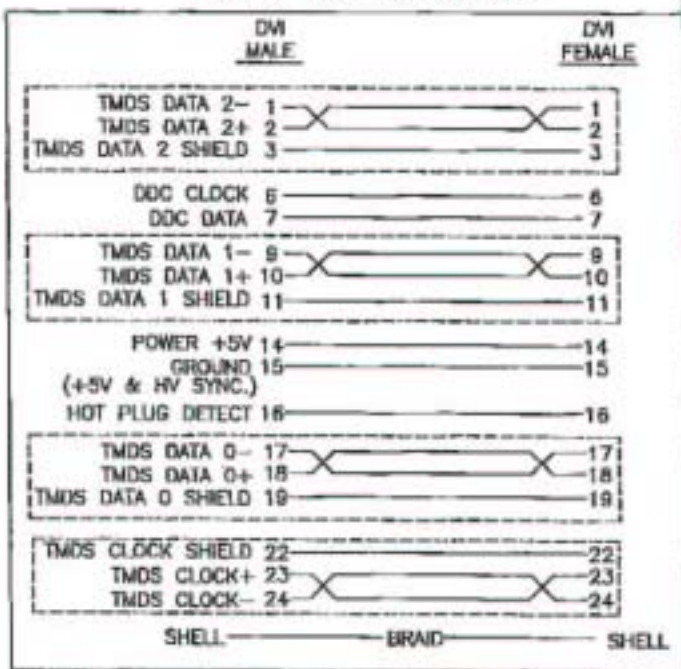

NOTE:

- THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
- WIRE MARKING:
 (TTL)® E193793 RJ AWM 20276 80°C 30V VW-1
 DVI SINGLE LINK DIGITAL

| P/N | L±(mm) |
|-----------|----------|
| DVI-MF-1M | 1000±50 |
| DVI-MF-2M | 2000±50 |
| DVI-MF-5M | 5000±100 |


UNITS:mm

| ITEM | DESCRIPTION | QTY. | UNIT |
|------|---|------|------|
| 1 | DVI MALE CONNECTOR (18+1) SHELL GOLD PLATED | 1 | PCS |
| 2 | BLACK COLOR HOOD | 2 | PCS |
| 3 | PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN | 2 | PCS |
| 4 | BLACK COLOR #4/40 THUMBSCREW | 4 | PCS |
| 5 | UL20276 (28AWGx1PAIR+AL-FOIL+DRAIN)x4C +(28AWG WIRE)x5C +AL-FOIL/MY+BRAID OVERALL ;BLACK COLOR PVC JACKET | SEE | DWG |
| 6 | DVI FEMALE CONNECTOR SHELL GOLD PLATED | 1 | PCS |

REVISED DETAILS

| REV. | DESCRIPTION | DATE | REVISED BY | Customer's P/N: | Revision: | © Copyright 12-2004 |
|------|-------------|------|------------|----------------------|---------------------|---------------------|
| | | | | SEE TABLE | ORIG | |
| | | | | RFQ number: 64393-3 | Drawing #: 041216-3 | |
| | | | | Drawn by: X.ZHOU | Scale: None | |
| | | | | Checked by: D.W. N/A | Date: 12/16/2004 | TTL13/H/佳成/041216-3 |

CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

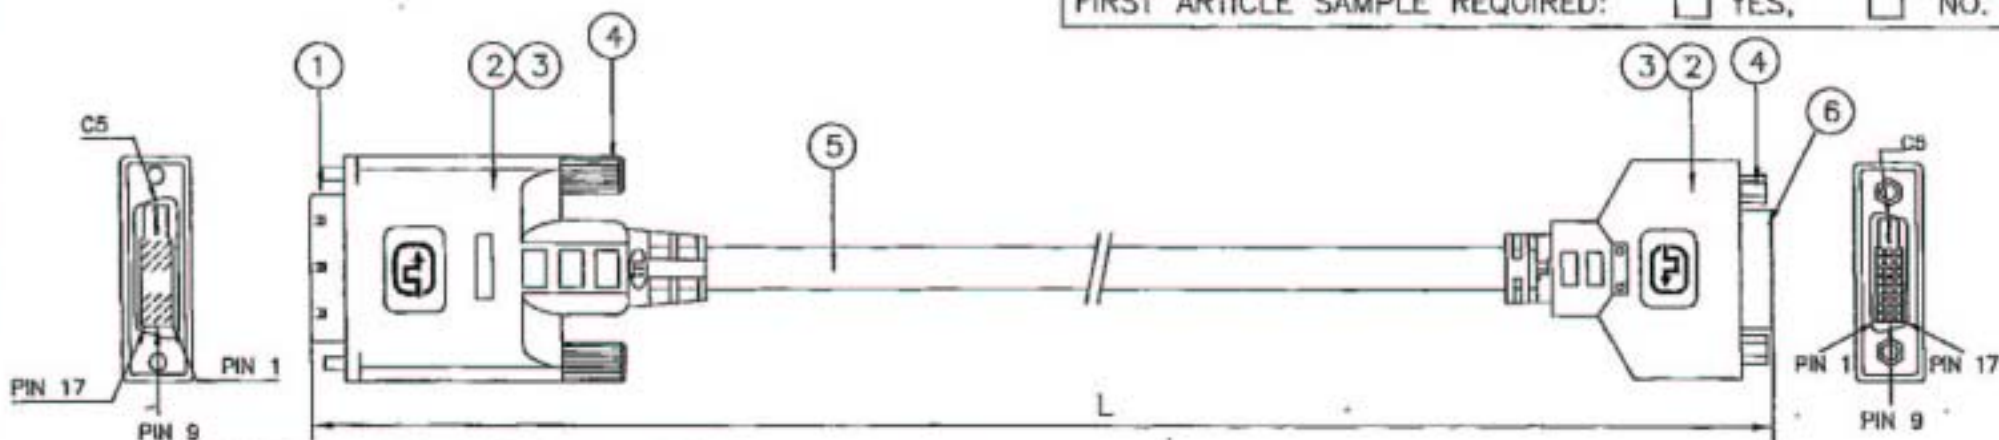

PINOUT CONFIGURATION

NOTE:


1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.

2. WIRE MARKING:

ⓉL® E193793 RJ AWM 20276 80°C 30V VW-1

DVI SINGLE LINK DIGITAL SUPER LOW ATTENUATION CABLE (SLAC™)

| P/N | L±(mm) |
|------------------|-----------|
| DVI-SLAC-MF-5M | 5000±100 |
| DVI-SLAC-MF-7.5M | 7500±100 |
| DVI-SLAC-MF-10M | 10000±150 |
| DVI-SLAC-MF-15M | 15000±150 |
| DVI-SLAC-MF-20M | 20000±200 |
| DVI-SLAC-MF-25M | 25000±200 |

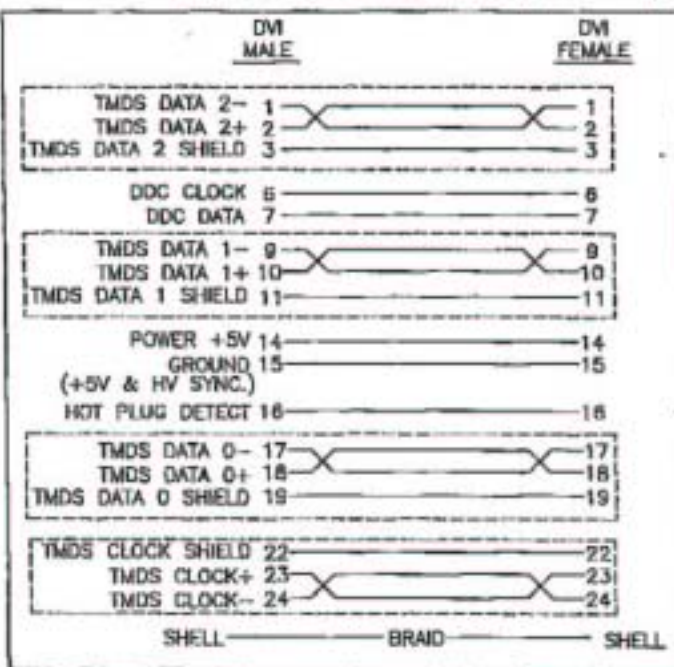

UNITS:mm

| ITEM | DESCRIPTION | QTY. | UNIT |
|------|---|------|------|
| 1 | DVI MALE CONNECTOR (18+1) SHELL GOLD PLATED | 1 | PCS |
| 2 | BLACK COLOR HOOD | 2 | PCS |
| 3 | PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN | 2 | PCS |
| 4 | BLACK COLOR #4/40 THUMBSCREW | 4 | PCS |
| 5 | UL20276 (24AWGx1PAIR+AL-FOIL+DRAIN)x4C +(28AWG WIRE)x5C +AL-FOIL/MY+DRAIN+BRAID OVERALL ;BLACK COLOR PVC JACKET | SEE | DWG |
| 6 | DVI FEMALE CONNECTOR SHELL GOLD PLATED | 1 | PCS |

REVISED DETAILS

| REV. | DESCRIPTION | DATE | REVISED BY |
|------|-------------|------|------------|
| | | | |
| | | | |
| | | | |

| | |
|-------------------------|---------------------|
| Customer's P/N: | Revision: |
| SEE TABLE | ORIG |
| RFQ number: 64393-4 | Drawing #: 041216-4 |
| Drawn by: X.ZHOU | Scale: None |
| Checked by: D.W.S. WBY6 | Date: 12/16/2004 |

© Copyright 12-2004