


CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

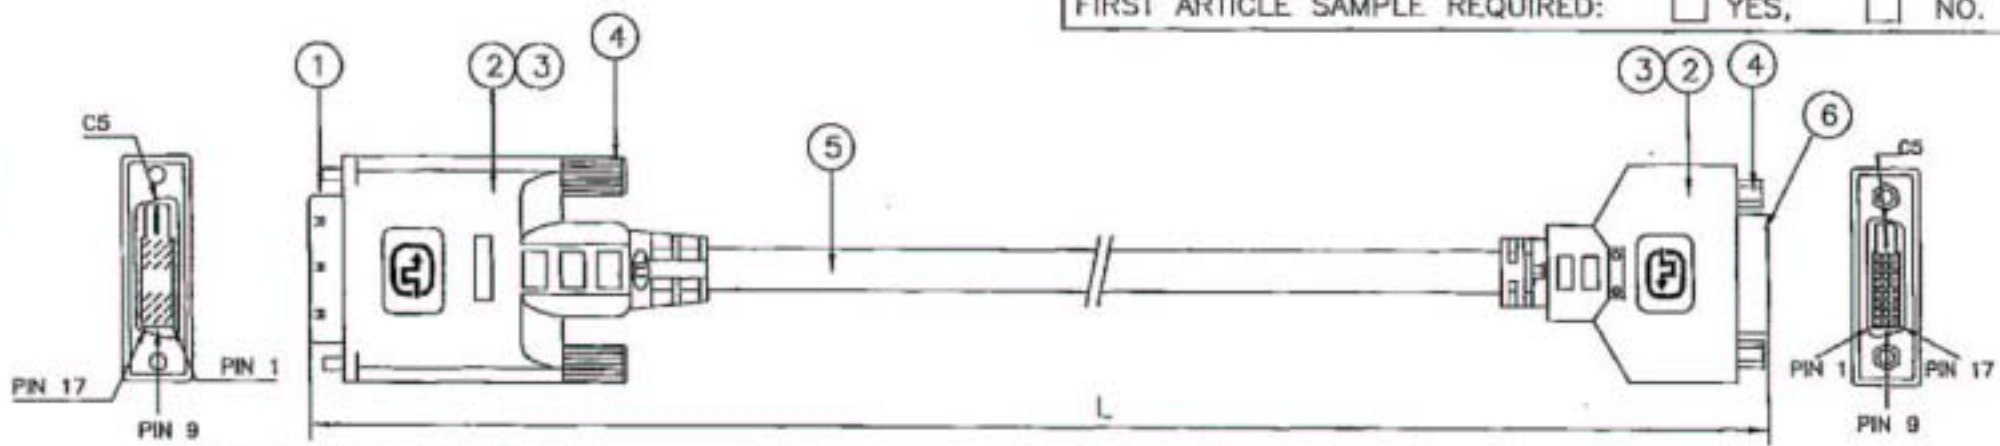

PINOUT CONFIGURATION

DVI MALE		DVI FEMALE	
TMDS DATA 2-	1	1	1
TMDS DATA 2+	2	2	2
TMDS DATA 2 SHIELD	3	3	3
DDC CLOCK	6	6	6
DDC DATA	7	7	7
TMDS DATA 1-	9	9	9
TMDS DATA 1+	10	10	10
TMDS DATA 1 SHIELD	11	11	11
POWER +5V	14	14	14
GROUND	15	15	15
(+5V & HV SYNC.)			
HOT PLUG DETECT	16	16	16
TMDS DATA 0-	17	17	17
TMDS DATA 0+	18	18	18
TMDS DATA 0 SHIELD	19	19	19
TMDS CLOCK SHIELD	22	22	22
TMDS CLOCK+	23	23	23
TMDS CLOCK-	24	24	24
SHELL		BRAID	SHELL

NOTE:

- THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
- WIRE MARKING:
 (TTL)® E193793 RJ AWM 20276 80°C 30V VW-1
 DVI SINGLE LINK DIGITAL

P/N	L±(mm)
DVI-MF-1M	1000±50
DVI-MF-2M	2000±50
DVI-MF-5M	5000±100

UNITS:mm

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR (18+1) SHELL GOLD PLATED	1	PCS
2	BLACK COLOR HOOD	2	PCS
3	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS
4	BLACK COLOR #4/40 THUMBSCREW	4	PCS
5	UL20276 (28AWGx1PAIR+AL-FOIL+DRAIN)x4C +(28AWG WIRE)x5C +AL-FOIL/MY+BRAID OVERALL BLACK COLOR PVC JACKET	SEE	DWG
6	DVI FEMALE CONNECTOR SHELL GOLD PLATED	1	PCS

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY

Customer's P/N: SEE TABLE
 Revision: ORIG
 RFQ number: 64393-3 Drawing #: 041216-3
 Drawn by: X.ZHOU Scale: None
 Checked by: D.W. N/A Date: 12/16/2004

© Copyright 12-2004

All information herein is proprietary and the exclusive property of Total Technology, Inc.

