


CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

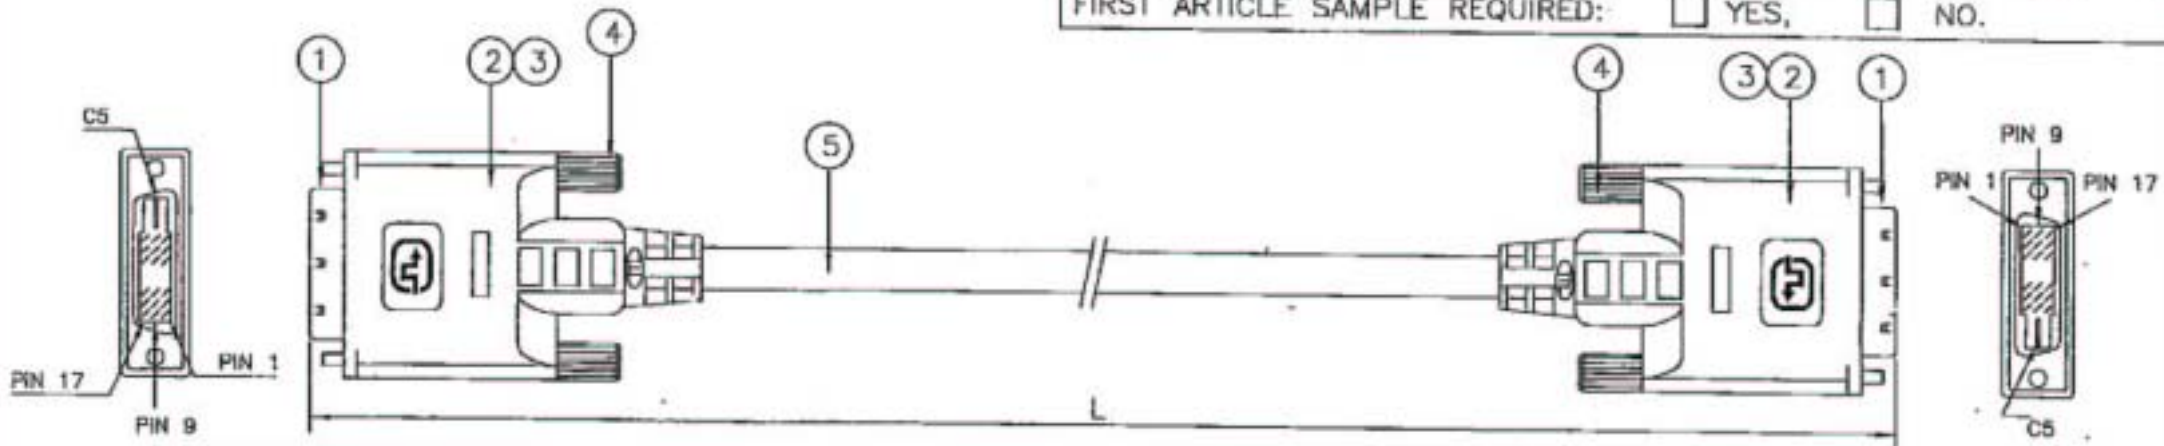


PINOUT CONFIGURATION

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
2. WIRE MARKING:
 (TTL)® E193793 RJ AWM 20276 80°C 30V VW-1
 DVI SINGLE LINK DIGITAL

P/N	L±(mm)
DVI-MM-1M	1000±50
DVI-MM-2M	2000±50
DVI-MM-5M	5000±100

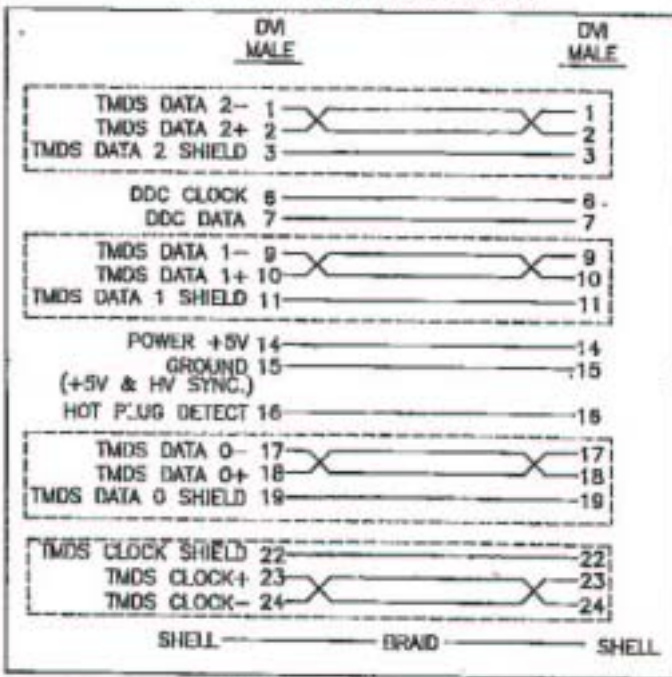

UNITS:mm

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR (18+1) SHELL GOLD PLATED.	2	PCS
2	BLACK COLOR HOOD	2	PCS
3	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS
4	BLACK COLOR #4/40 THUMBSCREW	4	PCS
5	UL20276 (28AWGx1PAIR+AL-FOIL+DRAIN)x4C +(28AWG WIRE)x5C +AL-FOIL/MY+BRAID OVERALL ;BLACK COLOR PVC JACKET	SEE	DWG

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY

Customer's P/N: SEE TABLE	Revision: ORIG
RFD number: 64393-1	Drawing #: 041216-1
Drawn by: X.ZHOU	Scale: None
Checked by: D.W. WANG	Date: 12/16/2004

© Copyright 12-2004

