

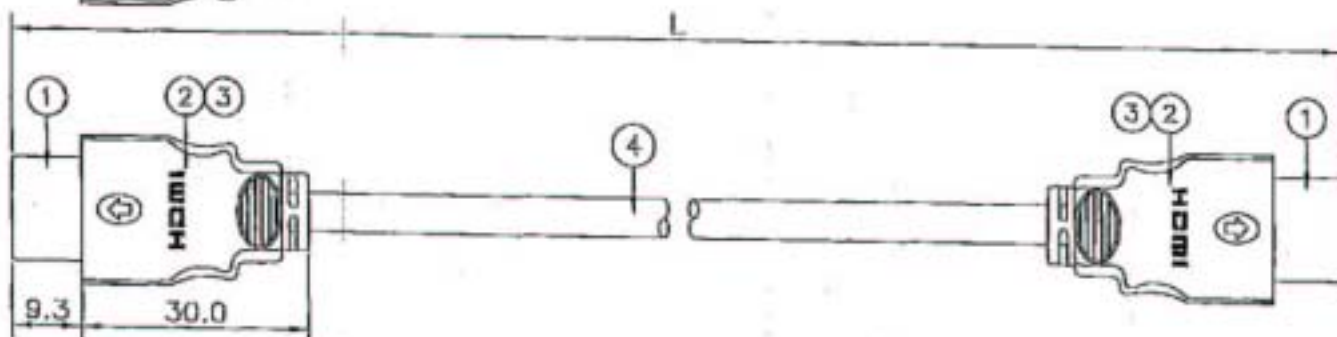


CUSTOMER'S APPROVAL: \_\_\_\_\_

DATE: \_\_\_\_\_


FIRST ARTICLE SAMPLE REQUIRED:  YES,  NO.



THIS WIRE SPEC CAN ONLY SUPPORTS THE ELECTRICAL PERFORMANCE UPTO 5 METERS. FOR LONGER LENGTH, PLEASE USE TTL'S PATENTED SLAC™ WIRE DESIGN.  
NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
2. WIRE MARKING:  
TTL E193793 R. AWM 20276 80°C 30V VW-1

PINOUT CONFIGURATION

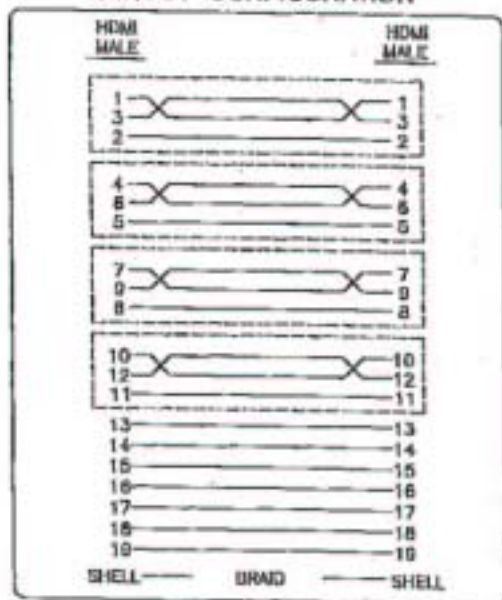

P/N	L±(mm)
HDMI-MM-0.5M	500±50
HDMI-MM-1M	1000±50
HDMI-MM-2M	2000±50
HDMI-MM-3M	3000±100
HDMI-MM-5M	5000±150

UNITS: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN CONNECTOR, MALE W/GOLD PLATED PINS UL94V-0	2	PCS.
2	BLACK MOLDED PVC HOOD	2	PCS.
3	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
4	(100Ω SHIELDED TWIN PAIRS)x4+7C WIRE; AL-FOIL+85% BRAID; BLACK PVC JACKET.	L	mm.



REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY
A	CHANGE HDMI MOLDED TYPE	JUL.24.04	G.ZHOU
B	CHANGE WIRE SPEC & PINOUT	AUG.12.04	G.ZHOU
C	ADD "HDMI" LOGO	AUG.16.04	G.ZHOU

Part number: HDMI-MM-L	Revision: C
RFQ number:	Drawing #: 046502
Drawn by: G.ZHOU	Scale: None
Checked by:	Date: 06/05/2004

© Copyright 06-2004

