

RADIAL TYPE

TX Series

High Ripple Current, High Reliability

JAMICON®

TH ← TX → WL

- High ripple current, low E.S.R. and long life
- Suitable for electronic ballast, adaptor and switching power




SPECIFICATION

Item	Characteristic								
Operation Temperature Range	-40 ~ +105°C					-25 ~ +105°C			
Rated Working Voltage	160 ~ 400VDC					450VDC			
Capacitance Tolerance (120Hz 20°C)	±20%(M)								
Leakage Current (20°C)	$I \leq 0.06CV + 10 (\mu A)$ Whichever is greater after 2 minutes					I : Leakage Current (μA)			
						C : Rated Capacitance (μF)			
Surge Voltage (20°C)	W.V.	160	200	250	350	400	450		
	S.V.	200	250	300	400	450	500		
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	160	200	250	350	400	450		
	tan δ	0.15	0.15	0.15	0.24	0.24	0.24		
Low Temperature Stability	Impedance ratio at 120Hz								
	Rated Voltage (V)	160 ~ 250			400		450		
	-25°C / +20°C	3			6		6		
	-40°C / +20°C	4			6		—		
Load Life	After 5000 hours application of WV at +105°C the capacitor shall meet the following limits.								
	Capacitance Change	$\leq \pm 20\%$ of initial value							
	Dissipation Factor	$\leq \pm 200\%$ of initial specified value							
	Leakage current	\leq initial specified value							
Shelf Life	At + 105°C no voltage application after 1000 hours. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hrs and not more than 48 hrs before measurement. Cap & DF shall meet the limits for load life characteristics, Leakage current $\leq 500\%$ of the initial specified value								

DIMENSIONS (mm)

ϕD	10	12.5	16	18
F	5.0	5.0	7.5	7.5
d	0.6	0.6	0.8	0.8
α	1.5	1.5	1.5	1.5

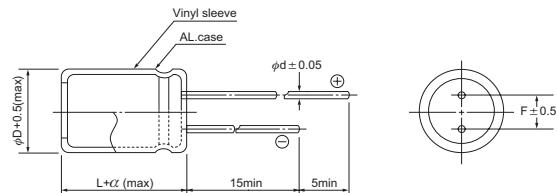

RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	65	75	85	95	105
Multiplier	1.8	1.65	1.50	1.25	1.00

Frequency (Hz)	120	1K	10K	100K
W.V.	Multiplier			
160~450 $\phi D=10mm$	0.25	0.61	0.88	1.00
	0.35	0.66	0.89	1.00

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
 Max impedance : Ω 20°C 100KHz
 Max ripple current : mA(rms) 105°C 100KHz

μF	V(Code)	160 (2C)			200 (2D)			250 (2E)				
		Code	Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.
10	100								→	10x20	3.18	240
22	220	10x20	1.47	350	10x20	1.47	350	12.5x20	1.74	380		
33	330	10x20	1.15	430	12.5x20	1.15	460	12.5x25	1.35	510		
47	470	12.5x20	0.92	550	12.5x20	0.92	550	12.5x25	1.08	610		
68	680	12.5x25	0.71	730	12.5x25	0.71	730	16x25	0.84	730		
100	101	16x25	0.59	890	16x25	0.59	890	16x31.5	0.70	980		
150	151	16x31.5	0.41	1210	16x31.5	0.41	1210	18x31.5	0.49	1290		
220	221	16x31.5	0.31	1460	18x35.5	0.31	1640	18x40	0.36	1730		
330	331	18x35.5	0.25	2010								

μF	V(Code)	350 (2V)			400 (2G)			450 (2W)			
		Code	Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.
3.3	3R3							→	10x20	4.47	150
4.7	4R7							→	12.5x20	3.77	190
10	100	10x20	2.94	220	10x20	2.94	290	12.5x25	2.95	300	
22	220	12.5x20	1.60	340	12.5x25	1.60	460	16x25	1.61	450	
33	330	12.5x25	1.25	460	12.5x25	1.25	620	16x31.5	1.25	620	
47	470	16x25	1.00	560	16x25	1.00	740	18x31.5	1.01	780	
68	680	16x31.5	0.78	740	16x31.5	0.78	990	18x35.5	0.78	990	
100	101	18x35.5	0.65	1010	18x35.5	0.65	1350				

All blank voltage on sleeve marking is the same voltage as " → " point to.